

nystrom

Drainable


FLOOR DOOR, 300PSF

Nystrom's newly redesigned Drainable Floor Door is intended for standard-duty exterior or high moisture areas where liquid flow is required. The frame is constructed with a gutter channel for runoff into a drainage system and includes an odor tight gasket.

FEATURES

LARGEST CLEAR OPENING The redesigned components are engineered with a maximum clear opening per comparible size against the competition.

OPTIONAL SAFETY GRATE Add additional safety and security to your floor door with a grate and nut rail. The grate is serrated for added slip resistance and allows for a 6 inch testing area.

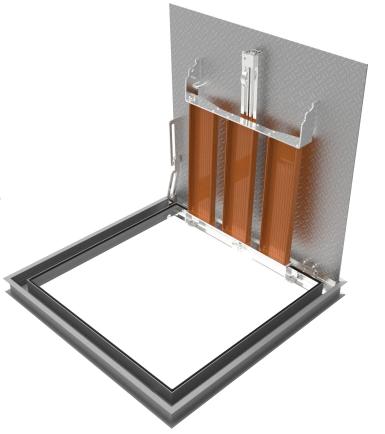

DETAILS

LOAD 300 psf live load

MATERIAL Aluminum: 1/4 inch, mill finish with gray primer on exterior

COVER Diamond tread plate

FRAME Drainable gutter frame with integral 1 inch anchor flange, EDPM airtight gasket and 1-1/2 inch drain coupling

INSTALLATION

- Cast In
- Bolt-In

SPRING Enclosed coil, Type 17-7 Stainless Steel

HINGES Heavy duty, Type 316 Stainless Steel

HOLD OPEN ARM Type 316 Stainless Steel automatic hold open arm locks cover in open position

LATCH Slam latch Type 316 Stainless Steel with inside lever handle, includes removable threaded plug and key

OPTIONS Padlock Hasps, Locks, Finishes, Safety Grates, Safety Nets, Safety Rails, Skirting

ORDER GUIDE

MOD	EL	MATERIAL	WIDTH		LENGTH	COVER	
FDD	Р			х			FL
		A 1/4" Aluminum	Standard Sizes (W x L) Single Door Double Door 24" x 24" 48" x 48" 30" x 36" 48" x 72" 36" x 36" 60" x 60" 42" x 42" 48" x 48"		0ouble Door 8" x 48" 8" x 72"	S Single Door D Double Door	

Additional sizes available, call 800.547.2635 for more information. Download Drawings, CAD, Specs, and LEED documents at www.nystrom.com

MATERIALS



Aluminum

INSTALLATION



Cast-in

